


PERLITE

INSULATING CONCRETE ROOFDECKS

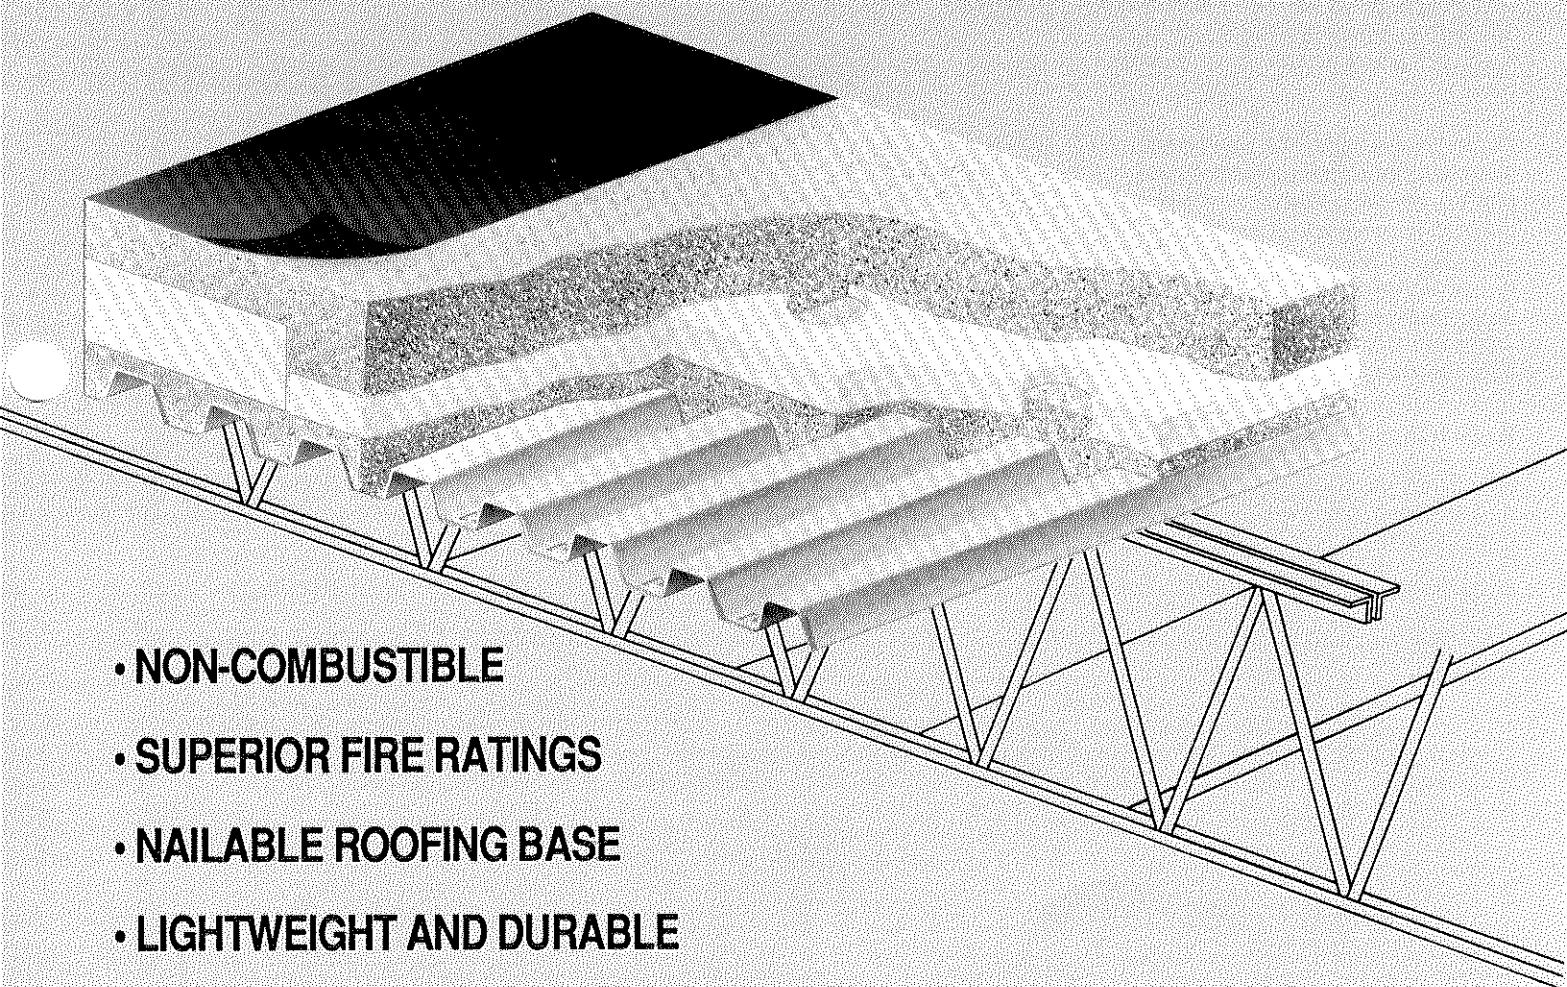

- **NON-COMBUSTIBLE**
- **SUPERIOR FIRE RATINGS**
- **NAILABLE ROOFING BASE**
- **LIGHTWEIGHT AND DURABLE**
- **COST EFFECTIVE REROOFING BASE**
- **SUPERIOR THERMAL PERFORMANCE**
- **SMOOTH, SLOPE-TO-DRAIN SURFACE**
- **MEETS FM AND U.L. WIND UPLIFT CRITERIA**

Perlite

INSULATING CONCRETE ROOF DECKS

Description, Properties, Benefits

ROOF INSULATION

Perlite concrete roof deck insulation is an ideal base for built-up and single ply roofing systems. It has superior wind and fire resistance over other roof insulation materials and with the addition of polystyrene insulation board sandwiched in the perlite concrete, high thermal resistance values, are economically achieved.

Positive drainage is easily accomplished by varying the thickness of perlite concrete or by stair stepping different thicknesses of polystyrene insulation board and then covering it with a uniform layer of perlite concrete.

Perlite concrete insulation may be placed over vented or slotted galvanized steel decking, precast or poured-in-place concrete, or existing roofing materials providing a seamless, smooth, and hard surface ready for roofing. If exposed to water it will not deteriorate.

REROOFING BASE

Perlite concrete insulation is ideally suited

for reroofing applications. It provides permanent, cost effective, slope-to-drain designs with high R values over flat and often irregular substrates found in reroofing projects. Using a perlite concrete slurry coat the polystyrene insulation board is positively attached to the substrate and covered with a uniform layer of perlite concrete insulation. If the existing substrate is sound and capable of the additional loading required then the perlite concrete insulation can be applied to the existing roof thereby eliminating costly tearoffs.

TESTING AND APPROVALS

Perlite roof deck insulation systems have been tested and approved for wind and fire ratings by Underwriters Laboratories, Factory Mutual, and other code authorities. The system is rated as non-combustible by Factory Mutual. U.L. Design P-920 successfully achieved the first 2 hour rating for any system of this kind under full scale fire conditions. Perlite concrete roof decks with polystyrene insulation board meet the criteria for U.L. Class 90 and FM I-90 wind resistance.

TO CONVERT FROM	TO	MULTIPLY BY
lb/ft ²	kg/m ²	4.882
lb/ft ³	kg/m ³	16.02
lb/in ²	bar	0.068947
inch	meter (m)	0.0254
ft ³	meter ³ (m ³)	0.02832
ft ²	meter ² (m ²)	0.0929
°F·ft ² /h·Btu·in (R)	kelvin meter per watt (°K·m/W)	6.929
Btu·in/h·ft ² ·°F (U)	watt per meter kelvin (W/m·°K)	0.144
gallons	liters	3.785

TABLE 2 - R-VALUE, U-FACTOR and DEADLOAD TABLE - 1:6 MIX RATIO, 24-30 pcf PERLITE INSULATION

2 in. of Perlite Concrete Over Polystyrene Thickness, In.	DEPTH OF CORRUGATIONS									STRUCTURAL CONCRETE, 4 in.		
	26 ga. 15/16 inch			24 ga. 1-5/16 inch			22 ga. 1-1/2 inch			R ⁽¹⁾	U ⁽²⁾	D.L. ⁽³⁾
	R ⁽¹⁾	U ⁽²⁾	D.L. ⁽³⁾	R ⁽¹⁾	U ⁽²⁾	D.L. ⁽³⁾	R ⁽¹⁾	U ⁽²⁾	D.L. ⁽³⁾			
0	3.9	.187	5.87	4.1	.177	6.65	4.1	.180	6.85	3.1	.216	4.00
1	7.9	.106	6.20	8.2	.103	6.98	8.1	.104	7.18	7.2	.115	4.33
2	11.7	.075	6.28	12.0	.074	7.06	12.0	.074	7.26	11.0	.080	4.41
3	15.6	.058	6.36	15.9	.058	7.14	15.8	.058	7.34	14.9	.061	4.49
4	19.4	.048	6.44	19.7	.047	7.22	19.7	.047	7.42	18.7	.049	4.57
5	23.3	.040	6.52	23.6	.040	7.30	23.5	.040	7.50	22.6	.042	4.65
6	27.1	.035	6.60	27.4	.035	7.38	27.4	.035	7.58	26.4	.036	4.73

NOTES:

- R values expressed as °F·ft²/h·Btu.
- U factors expressed as Btu/h·ft²·°F. Includes air films and roofing.
- Dead loads include weight of metal, polystyrene and perlite concrete roof insulation. Dead loads of structural concrete not included.
- Insulation values are for summer conditions, heat flow down. To calculate winter conditions, heat flow up, subtract 0.39 from the R value, then add 1.5 for air films and roofing, and divide into 1

for the U value.

5. U factors are based on series-parallel heat flow calculations defined in the ASHRAE Handbook of Fundamentals and on test data by recognized, independent test laboratories. Thermal conductivities of roof deck components are based on 40°F mean temperature except perlite concrete which is based on 75°F.

6. Perlite concrete properties are based on constant thickness insulation. For sloped insulation, calcu-

late average thickness.

7. The U factors shown are calculations based on thermal conductivity data derived from laboratory testing of dry materials in accordance with ASTM Specification C 177. The values shown are intended only as guidelines. Actual insulation performance for all materials and systems is affected by design of building, environment and installation and will be lower than calculated values.

Perlite

INSULATING CONCRETE ROOF DECKS

Physical Properties/Calculations

CODE APPROVALS AND GUIDE REFERENCES

- International Conference of Building Officials (ICBO)
- Building Officials Conference of America (BOCA)
- Southern Building Code Congress (SBCC)
- South Florida Building Code
- Federal Construction Guide Specification FCGS 03501
- U.S. Army Corps of Engineers

Guide Specifications: CEGS 03510

TECHNICAL SUPPORT

- FM I-90 Wind Uplift
- FM Serial Report No. OC2AO-AC
- U.L. Wind Uplift Construction No. 143
- U.L. Wind Uplift Construction No. 250
- U.L. Fire Rated Designs

TABLE 5- CALCULATIONS FOR R, AND U-FACTOR

EXAMPLE: 2 in. (51mm) of 27 lb/ft³ (432 kg/m³) perlite concrete fill and 1 in. (25mm) polystyrene insulation board placed over 26 gauge steel form with acoustical tile ceiling.

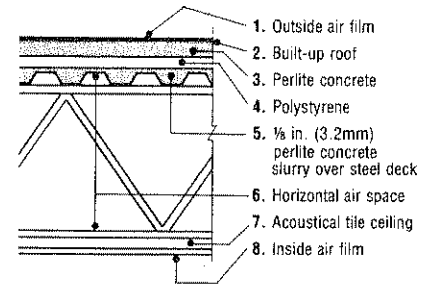


TABLE 3-UL. FIRE RATED SYSTEMS

P405	3 hours	P902	2 hours	P923	2 hours
P406	3 hours	P905	2 hours	P231	1-1/2 hours
P215	2 hours	P907	2 hours	P513	1-1/2 hours
P241	2 hours	P908	2 hours	P919	1-1/2 hours
P251	2 hours	P910	2 hours	P214	1 hour
P407	2 hours	P913	2 hours	P216	1 hour
P410	2 hours	P916	2 hours	P246	1 hour
P708	2 hours	P920	2 hours	P509	1 hour
P810	2 hours	P921	2 hours	P511	1 hour
P812	2 hours	P922	2 hours	P678	1 hour
				P903	1 hour

	R Values* Heat Flow Down (Summer)	R Values* Heat Flow Up (Winter)
1	0.25	0.17
2	0.33	0.33
3	3.13	3.13
4	3.85	3.85
5	0.93	0.93
6	1.23	0.85
7	1.79	1.79
8	0.92	0.61

Rt	12.43	11.66
U	0.087	0.09

U-Factor = 1/Rt

*R values expressed in Btu/h·ft²·°F units

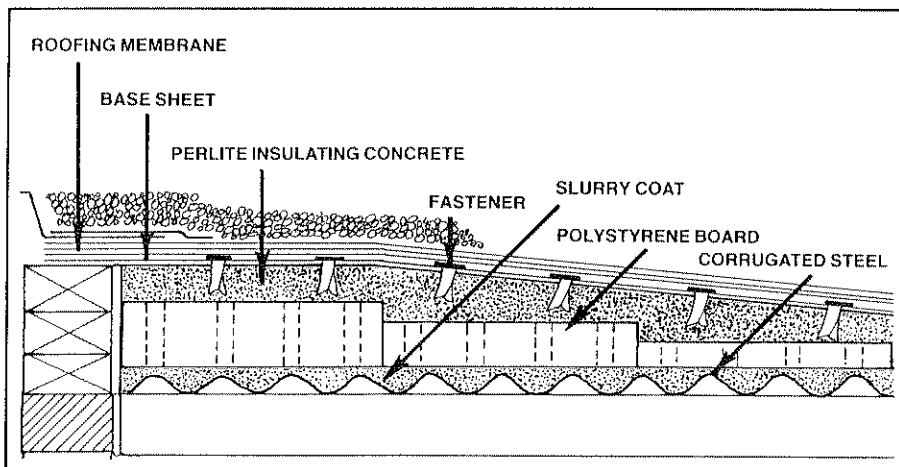


TABLE 4- TYPICAL PHYSICAL PROPERTIES AND MIX PROPORTIONS FOR PERLITE CONCRETE**

TYPICAL PROPERTIES				TYPICAL MIX PROPORTIONS			
CEMENT TO AGGREGATE RATIO (BY VOLUME)	DRY DENSITY RANGE lb/ft ³	MINIMUM COMPRESSIVE STRENGTH lb/in ²	WET DENSITY RANGE lb/ft ³	CEMENT ft ³	PERLITE ft ³	WATER gallons	AEA †
1:4	36-42	300	48-56	6.75	27	61	†
1:6	24-30	125	38-44	4.5	27	54	†

* Pittsburgh Testing Laboratory and R.W. Hunt Co. Engineers.

** All values based on 28 day test results.

† Consult perlite manufacturer for recommended type and proportioning of air entraining agent

